


X1/Y2 IEC60384-14   EN132400, EN61000-4-5

**X1/Y2** Ceramic Chip Capacitors

Werte: 5.0pF (Code 5R0) bis 1.0nF (Code 102)

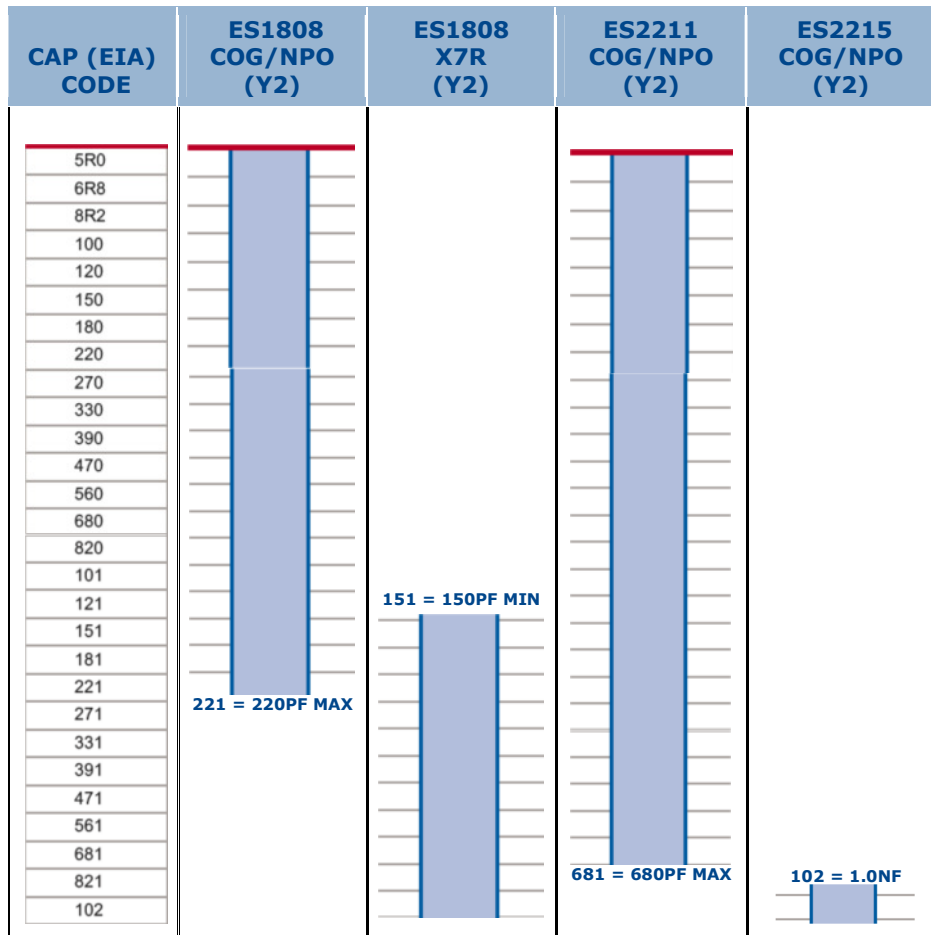

<b>ES2215</b>	<b>N</b>	<b>102</b>	<b>K</b>	<b>502</b>	<b>N</b>	<b>(X) TM</b>
Bauform	Dielectric	Kapazität	Toleranz	Spannung	Kontaktierung	Gurtung
ES1808	N = COG	100 = 10pF	J = 5%	250VAC/5KV	N = RoHS	T = gegurtet
ES2211	B = X7R	101 = 100pF	K = 10%	X1/Y2 Cap	Nickelsperr	M= Marking
ES2215		102 = 1.0nF				

